

CALIBRE

Designed and extruded by leading profile supplier REHAU, the Calibre window & door system is a modern, 45° chamfered multi-chambered product and ideal for today's competitive market.

SPECIFICATION

OUTERFRAMES: Choice of 55mm & 67mm chamfered frames.

SASH: 75mm chamfered sash.

GLAZING: Internally beaded for 28mm double glazed units.

GLAZING BEAD: Ogee.

GASKET: Pre-inserted black gaskets.

CASEMENT HARDWARE: Yale friction stays and shootbolt locking system with optional hinge guards for added security.

TILT & TURN HARDWARE: Winkhaus Activpilot Tilt before Turn locking gearing.

RESIDENTIAL DOORS: Millenco Mantis high security multipoint lock. All doors hung on 3 no. flag hinges.

FRENCH DOORS: Millenco Mantis high security multipoint lock to master door, with a choice of matching slave lock or profile specific finger bolts to slave door. All doors hung on 3 no. flag hinges.

CILLS: 95mm, 150mm, 180mm & 225mm.

FRAME EXTENDERS: 20mm & 50mm.


JOINERS: 2mm, 10mm & 24mm

COLOUR OPTIONS: White, Rosewood on White, Anthracite Grey (grained) on White as standard. Other foils available on request.

ENERGY RATING: Easily achieves an energy rating of A.

SECURED BY DESIGN: Available on Calibre casement windows if specified.

DOCUMENT Q: Calibre casement windows are Document Q compliant with correct specification and can therefore be specified for New Build properties.

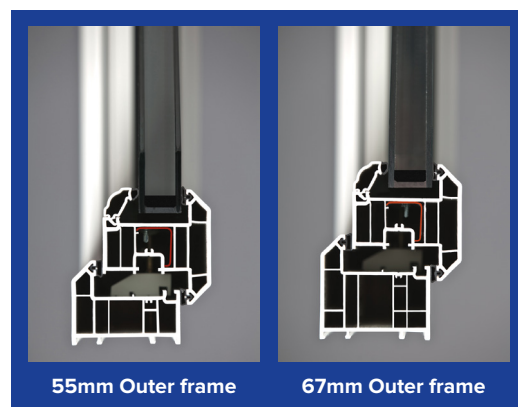

For any other window specification not shown on this sheet, please enquire about the other window and door systems manufactured by CLIMATEC WINDOWS LTD