

ALUMINIUM DOOR THRESHOLDS - VARIOUS

Inside:


- Ali Door Thresholds - Summary
- AM3EX Door Threshold Cill - Inward Opening Doors
- AM3EX Door Threshold Sub Cill - Inward Opening Doors
- AM5EX Door Threshold Cill - Outward Opening Doors
- AM5EX Door Threshold Sub Cill - Outward Opening Doors
- Roto BKV Door Threshold
- Deceuninck Slider24 Low Aluminium Threshold

For further assistance, call 01702 613733


www.climatec-windows.co.uk

11-14 Fletchers Square, Temple Farm Industrial Estate, Southend-on-Sea, Essex SS2 5RN


ALUMINIUM DOOR THRESHOLD SYSTEMS

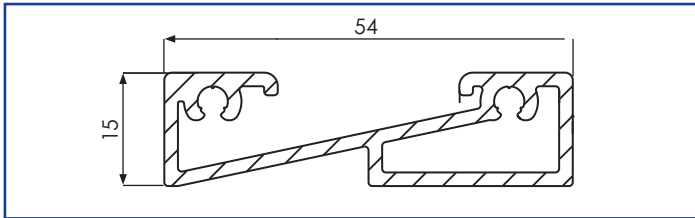


Rehau 15mm Low Threshold
Single Doors Only
White Gasket Only

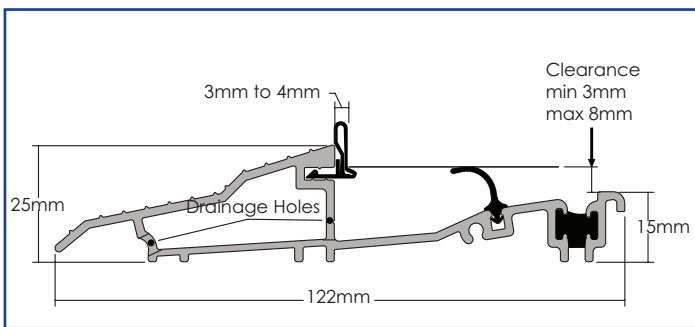


Stormguard AM3EX Threshold Cill - Open In
Black Gasket Only

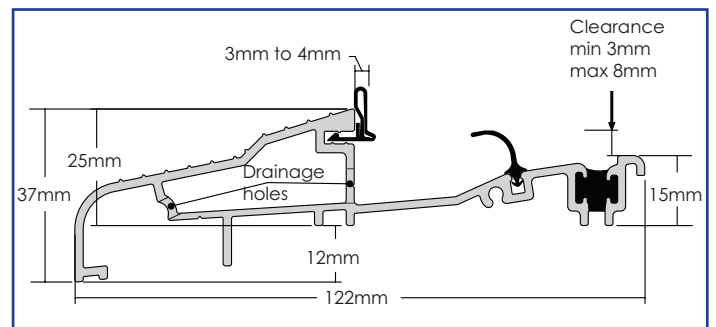


Stormguard AM3EX Threshold Sub Cill - Open In
Black Gasket Only

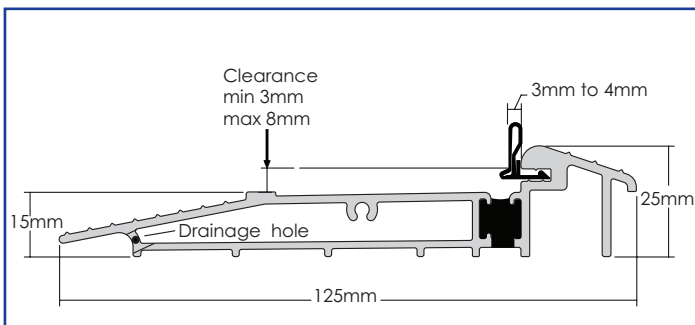

Stormguard AM5EX Threshold Cill - Open Out
Black Gasket Only

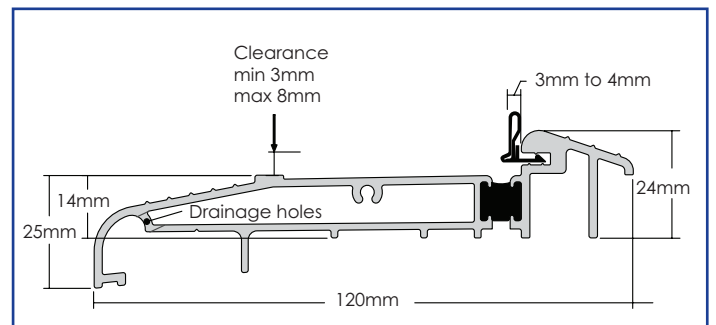

Stormguard AM5EX Threshold Sub Cill - Open Out
Black Gasket Only

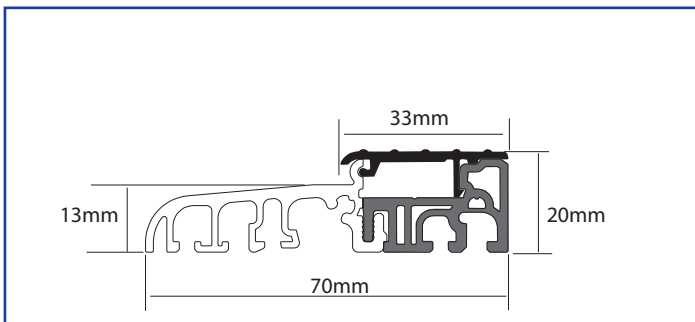

Roto BKV Low Threshold
Black Gasket Only



For further assistance, call 01702 613733

www.climatec-windows.co.uk

11-14 Fletchers Square, Temple Farm Industrial Estate, Southend-on-Sea, Essex SS2 5RN

AM3EX DOOR THRESHOLD CILL - INWARD OPENING DOOR

- ❖ Suitable for inward opening doors.
- ❖ Fully tested resin thermal break.
- ❖ Mobility easy access.
- ❖ Designed for door set manufacturers, can be installed as the fourth side of a door frame or retro fitted.
- ❖ Thermally broken to meet thermal bridging and insulation requirements, can be used with many different frame and door materials eg. wood, PVCu, fibreglass, aluminium, steel and carbon fibre.
- ❖ Designed to fit directly onto level thresholds.
- ❖ Ideal for use with carpeted floors. Optional clip-in internal transition ramps also allow use with tiled or wooden floors.
- ❖ Non-slip surfaces ensure a safe grip in wet conditions.
- ❖ Available in Matt Aluminium or Matt Gold Effect Aluminium.
- ❖ Sizes - 1m, 2m and 3m
- ❖ Available with black gasket only

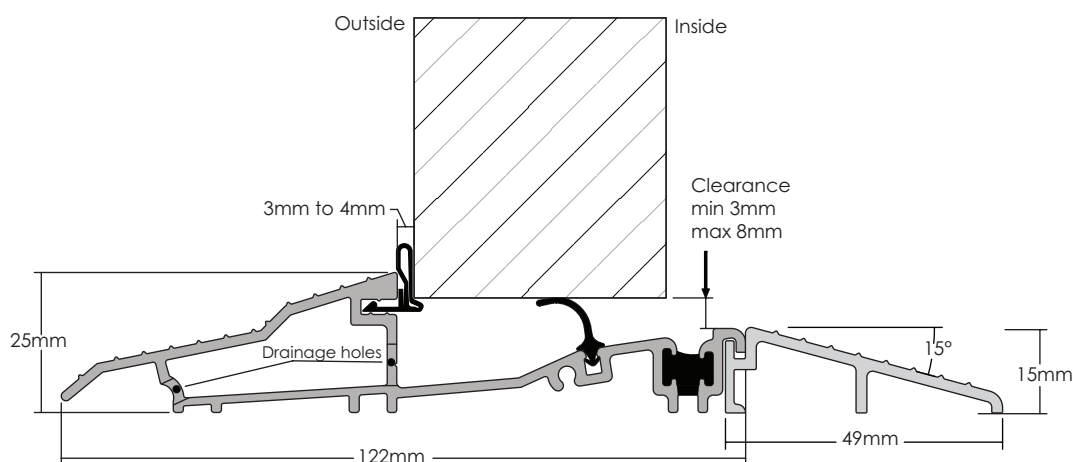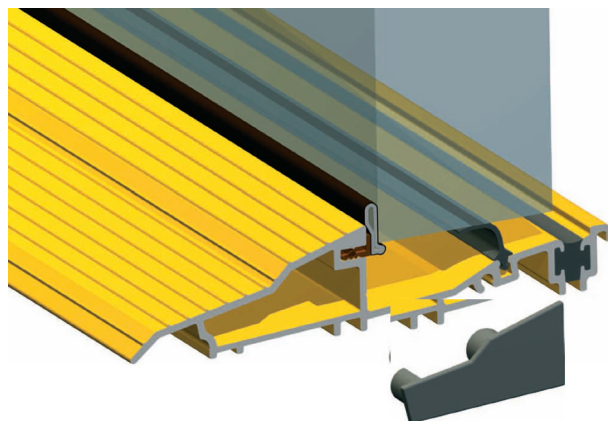



For further assistance, call 01702 613733

www.climatec-windows.co.uk

11-14 Fletchers Square, Temple Farm Industrial Estate, Southend-on-Sea, Essex SS2 5RN

AM3EX DOOR THRESHOLD SUB CILL - INWARD OPENING DOOR

- ❖ Suitable for inward opening doors.
- ❖ Mobility easy access.
- ❖ Can meet Part 'M' requirements when the overall threshold design is specified correctly.
- ❖ With optional clip in transition ramp for wood or tile floors.
- ❖ Fully tested resin thermal break.
- ❖ Available in Matt Aluminium or Matt Gold Effect Aluminium.
- ❖ Sizes - 1m, 2m and 3m.
- ❖ Compatible with 150mm, 180mm and 225mm cills only - Not compatible with 95mm cill.
- ❖ Available with black gasket only

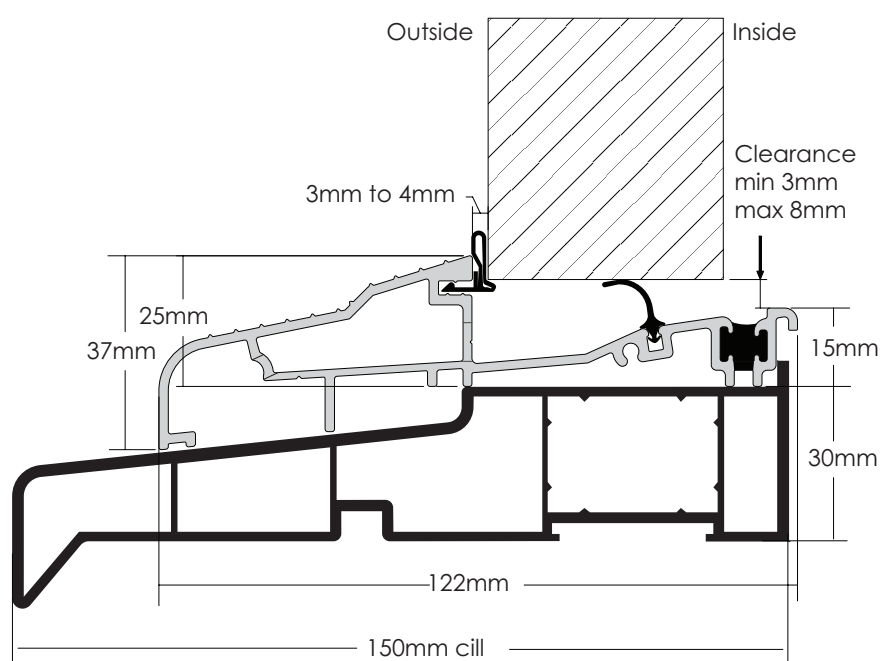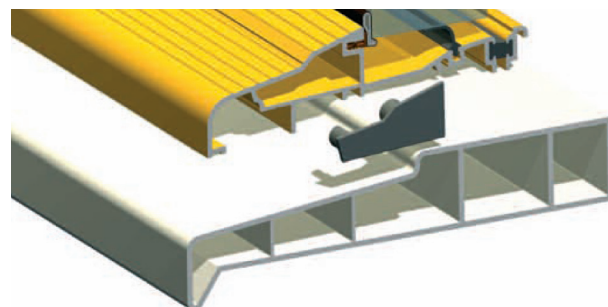



For further assistance, call 01702 613733

www.climatec-windows.co.uk

11-14 Fletchers Square, Temple Farm Industrial Estate, Southend-on-Sea, Essex SS2 5RN

AM5EX DOOR THRESHOLD CILL - OUTWARD OPENING DOOR

- ❖ Suitable for outward opening doors.
- ❖ Fully tested resin thermal break.
- ❖ Mobility easy access.
- ❖ Designed for door set manufacturers, can be installed as the fourth side of a door frame or retro fitted.
- ❖ Thermally broken to meet thermal bridging and insulation requirements, can be used with many different frame and door materials eg. wood, PVCu, fibreglass, aluminium, steel and carbon fibre.
- ❖ Designed to fit directly onto level thresholds.
- ❖ Ideal for use with carpeted floors. Optional clip-in internal transition ramps also allow use with tiled or wooden floors.
- ❖ Non-slip surfaces ensure a safe grip in wet conditions.
- ❖ Available in Matt Aluminium or Matt Gold Effect Aluminium.
- ❖ Sizes - 1m, 2m and 3m.
- ❖ Available with black gasket only.

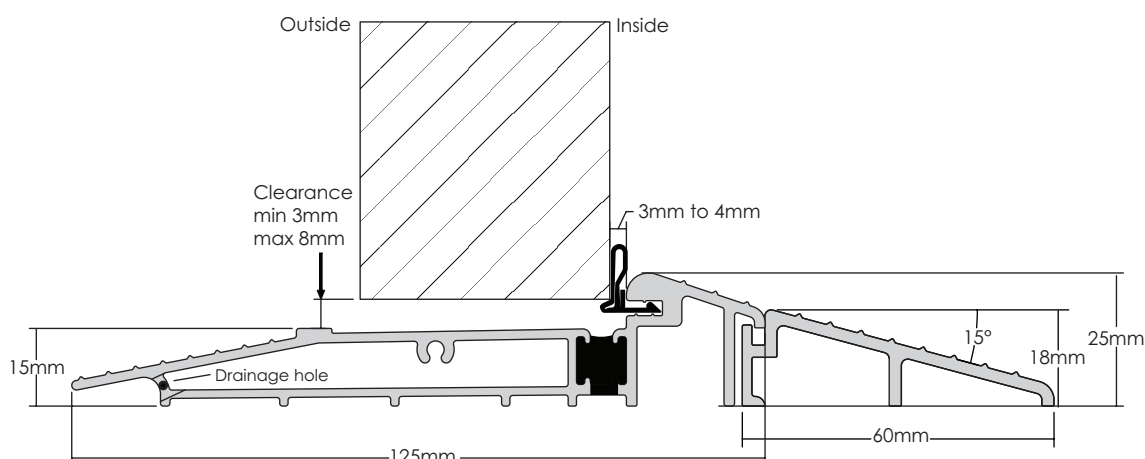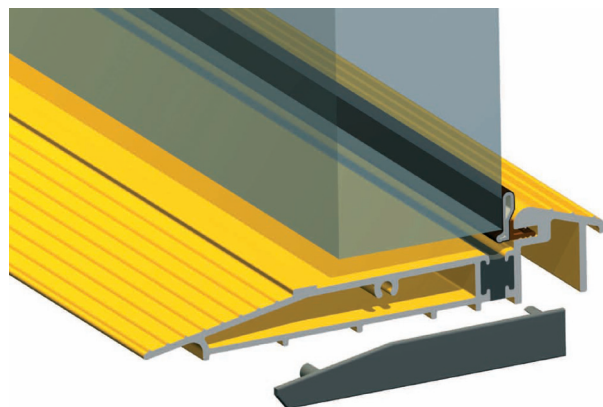



For further assistance, call 01702 613733

www.climatec-windows.co.uk

11-14 Fletchers Square, Temple Farm Industrial Estate, Southend-on-Sea, Essex SS2 5RN

AM5EX DOOR THRESHOLD SUB CILL - OUTWARD OPENING DOOR

- ❖ Suitable for outward opening doors.
- ❖ Mobility easy access.
- ❖ Can meet Part 'M' requirements when the overall threshold design is specified correctly.
- ❖ With optional clip in transition ramp for wood or tile floors.
- ❖ Fully tested resin thermal break.
- ❖ Available in Matt Aluminium or Matt Gold Effect Aluminium.
- ❖ Sizes - 1m, 2m and 3m.
- ❖ Compatible with 150mm, 180mm and 225mm cills only - Not compatible with 95mm cill.
- ❖ Available with black gasket only.

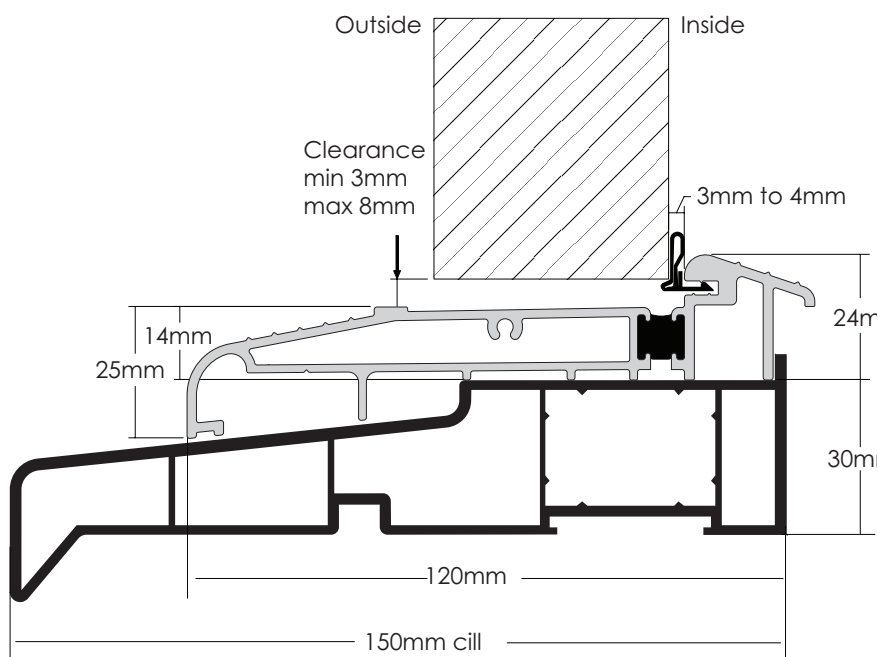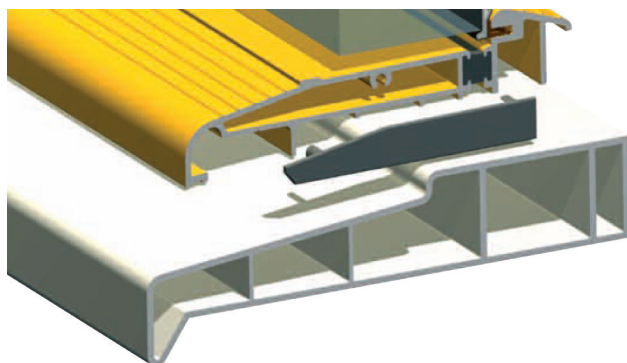

For further assistance, call 01702 613733

www.climatec-windows.co.uk


11-14 Fletchers Square, Temple Farm Industrial Estate, Southend-on-Sea, Essex SS2 5RN

ROTO BKV DOOR THRESHOLD




Low threshold system for doors.


- ❖ Thermally insulated inner area.
- ❖ Suitable for disabled access requirements in accordance with DIN 18025.
- ❖ Threshold width - 70mm
- ❖ Can be used with external cill.
- ❖ Concealed screw connection.
- ❖ PVC parts resistant to UV rays.
- ❖ Suitable for French doors.
- ❖ Available in silver and bronze.
- ❖ Available with black gasket only.

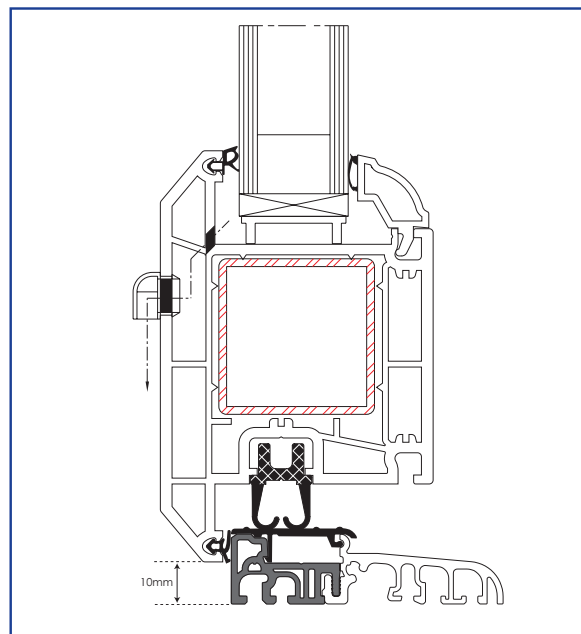

Roto BKV Low Threshold - opening out

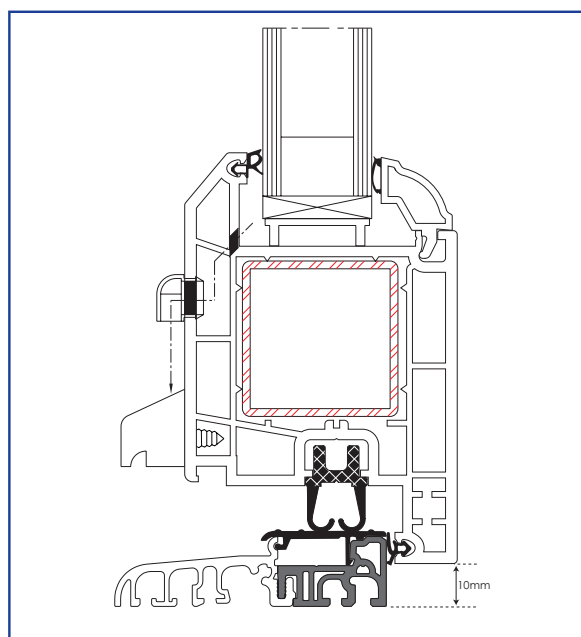

Roto BKV Low Threshold - opening in

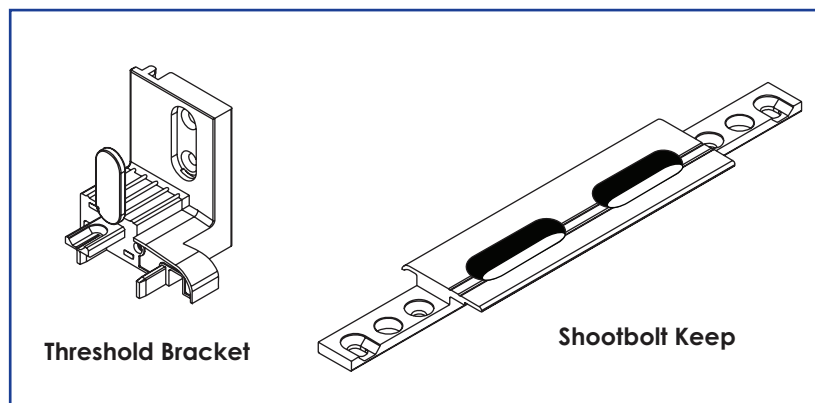

Threshold Bracket

Shootbolt Keep


For further assistance, call 01702 613733

www.climatec-windows.co.uk

11-14 Fletchers Square, Temple Farm Industrial Estate, Southend-on-Sea, Essex SS2 5RN

DECEUNINCK SLIDER24 LOW ALUMINIUM THRESHOLD

- ❖ Suitable for internally/externally sliding doors.
- ❖ Available in white and black finishes.
- ❖ 15mm high.
- ❖ Designed in line with current Part M requirements.
- ❖ Suitable for 2, 3 and 4 pane patio doors.
- ❖ Stainless steel running track.
- ❖ Thermally broken for improved thermal efficiency.
- ❖ Fully weather tested:
Slider 24 - Air Class 4 600Pa / Water Class 5A 200Pa / Wind Class A3 1200Pa
Slider 24+ - Air Class 2 300Pa / Water Class 8A 450Pa / Wind Class C3 1200Pa

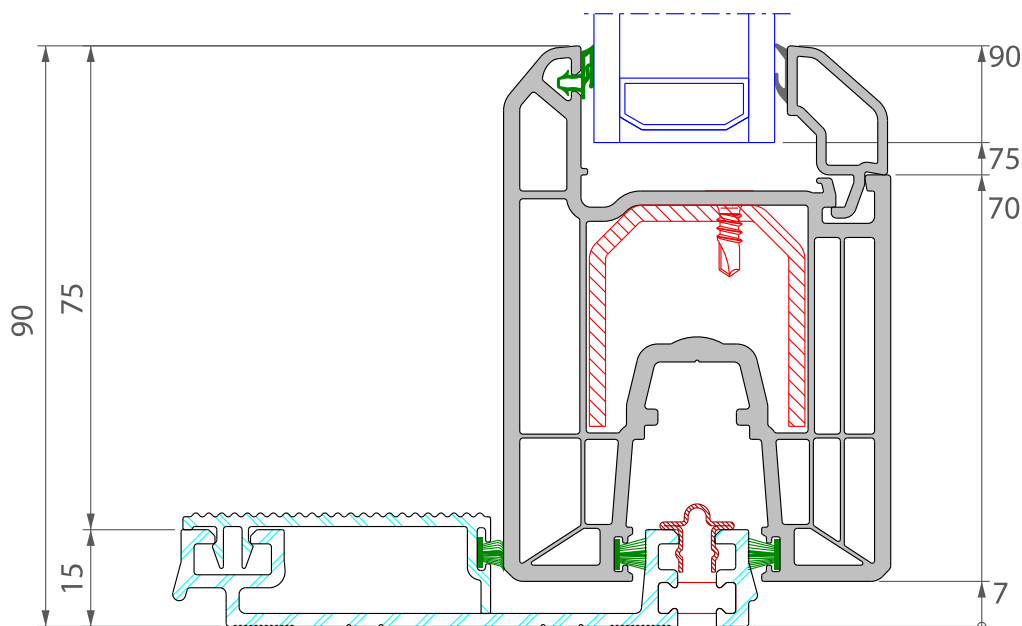

For further assistance, call 01702 613733

www.climatec-windows.co.uk

11-14 Fletchers Square, Temple Farm Industrial Estate, Southend-on-Sea, Essex SS2 5RN