

ALUMINIUM DOOR THRESHOLDS - VARIOUS


Inside:

- Ali Door Thresholds Summary
- AM3EX Door Threshold Cill Inward Opening Doors
- AM3EX Door Threshold Sub Cill Inward Opening Doors
- AM5EX Door Threshold Cill Outward Opening Doors
- AM5EX Door Treshold Sub Cill Outward Opening Doors
- Roto BKV Door Threshold
- KAT Patio Door Low Aluminium Threshold
- KAT Bi-Fold Door Low Aluminium Threshold


For further assistance, call 01702 613733




ALUMINIUM DOOR THRESHOLD SYSTEMS




Rehau 15mm Low Threshold Single Doors Only

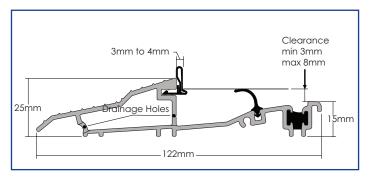


Stormguard AM3EX Threshold Cill - Open In

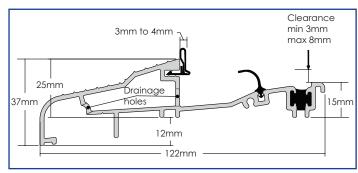


Stormguard AM3EX Threshold Sub Cill - Open In

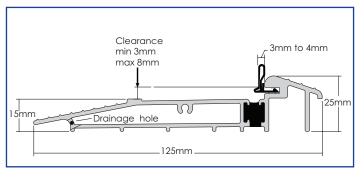

Stormguard AM5EX Threshold Cill - Open Out

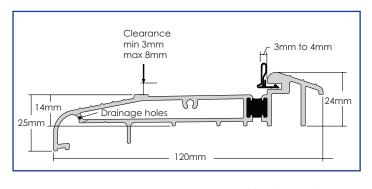

Stormguard AM5EX Threshold Sub Cill - Open Out

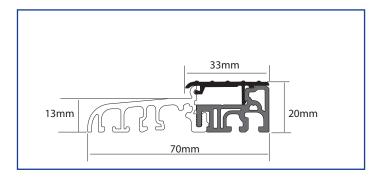


Roto BKV Low Threshold


For further assistance, call 01702 613733




AM3EX DOOR THRESHOLD CILL - INWARD OPENING DOOR


- Suitable for inward opening doors.
- Fully tested resin thermal break.
- Mobility easy access.
- Designed for door set manufacturers, can be installed as the fourth side of a door frame or retro fitted.
- Thermally broken to meet thermal bridging and insulation requirements, can be used with many different frame and door materials eg. wood, PVCu, fibreglass, aluminium, steel and carbon fibre.





- Non-slip surfaces ensure a safe grip in wet conditions.
- * Available in Matt Aluminium or Matt Gold Effect Aluminium.
- Sizes 1m, 2m and 3m.



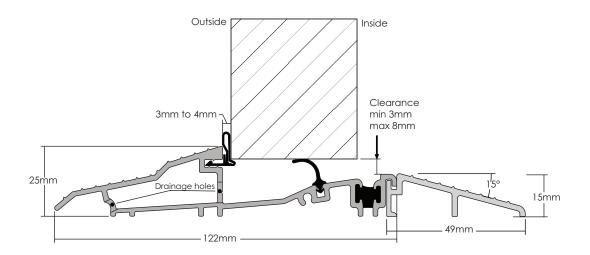



For further assistance, call 01702 613733



AM3EX DOOR THRESHOLD SUB CILL - INWARD OPENING DOOR

- Suitable for inward opening doors.
- Mobility easy access.
- Can meet Part 'M' requirements when the overall threshold design is specified correctly.
- With optional clip in transition ramp for wood or tile floors.
- Fully tested resin thermal break.
- Available in Matt Aluminium or Matt Gold Effect Aluminium.
- Sizes 1m, 2m and 3m.
- Compatible with 150mm, 180mm and 225mm cills only - Not compatible with 95mm cill.



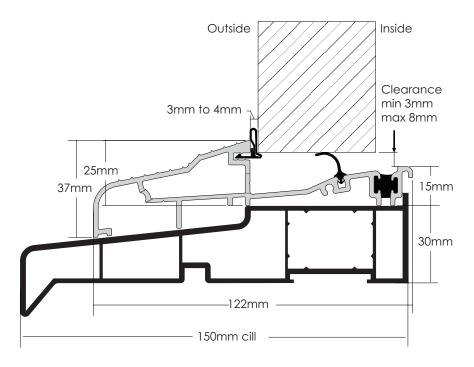

For further assistance, call 01702 613733


www.climatec-windows.co.uk

11-14 Fletchers Square, Temple Farm Industrial Estate, Southend-on-Sea, Essex SS2 5RN




AM5EX DOOR THRESHOLD CILL - OUTWARD OPENING DOOR

- Suitable for outward opening doors.
- Fully tested resin thermal break.
- Mobility easy access.
- Designed for door set manufacturers, can be installed as the fourth side of a door frame or retro fitted.
- Thermally broken to meet thermal bridging and insulation requirements, can be used with many different frame and door materials eg. wood, PVCu, fibreglass, aluminium, steel and carbon fibre.



- Designed to fit directly onto level thresholds.
- Ideal for use with carpeted floors. Optional clip-in internal transition ramps also allow use with tiled or wooden floors.
- Non-slip surfaces ensure a safe grip in wet conditions.
- ❖ Available in Matt Aluminium or Matt Gold Effect Aluminium.
- Sizes 1m, 2m and 3m.

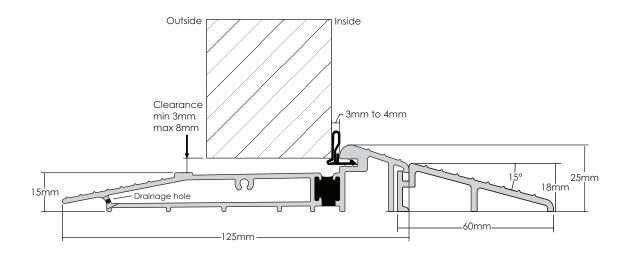



For further assistance, call 01702 613733



AM5EX DOOR THRESHOLD SUB CILL - OUTWARD OPENING DOOR

- Suitable for outward opening doors.
- Mobility easy access.
- Can meet Part 'M' requirements when the overall threshold design is specified correctly.
- With optional clip in transition ramp for wood or tile floors.
- Fully tested resin thermal break.
- Available in Matt Aluminium or Matt Gold Effect Aluminium.
- Sizes 1m, 2m and 3m.
- Compatible with 150mm, 180mm and 225mm cills only - Not compatible with 95mm cill.



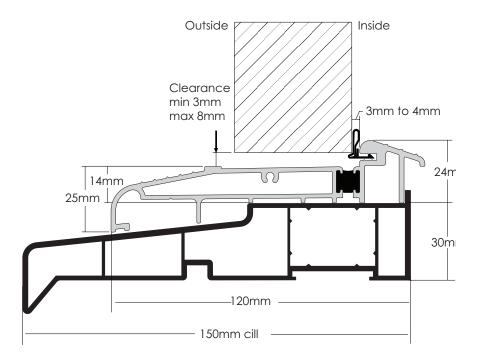

For further assistance, call 01702 613733





ROTO BKV DOOR THRESHOLD




Low threshold system for doors.

- Thermally insulated inner area.
- Suitable for disabled access requirments in accrodance with DIN 18025.
- Threshold width 70mm
- Can be used with external cill.
- Concealed screw connection.
- PVC parts resistant to UV rays.
- Suitable for French doors.
- ❖ Available in silver and bronze.

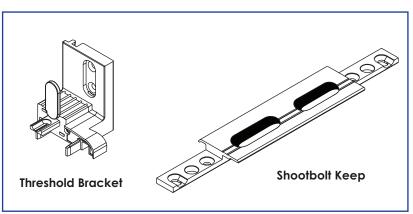



Roto BKV Low Threshold - opening out



Roto BKV Low Threshold - opening In


For further assistance, call 01702 613733



KAT PATIO DOOR LOW ALUMINIUM THRESHOLD

- Suitable for internally sliding doors.
- Available in anodised silver and gold finishes.
- 20mm high.
- Part M compliant threshold solution exceeds the latest version of building regulations.
- Suitable for 2, 3 and 4 pane Elegance patio doors.
- Build in drainage system with integral end caps no unsightly drainage slots.
- Optional ramps for wheelchair access.
- Stainless steel running track.
- The fixed pane has a built in security bar so the door cannot be lifted off the threshold.
- Thermally broken for improved thermal efficiency.
- Fully weather tested to BS6735 part 1 and achieves class 3A.



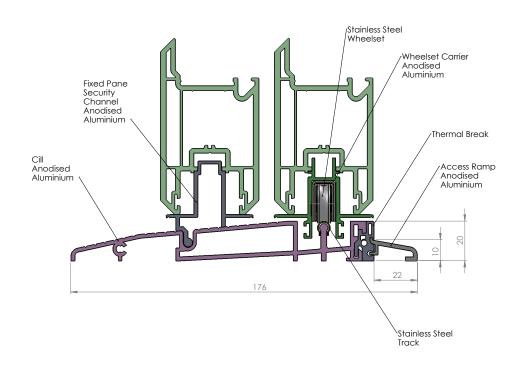

For further assistance, call 01702 613733

www.climatec-windows.co.uk


11-14 Fletchers Square, Temple Farm Industrial Estate, Southend-on-Sea, Essex SS2 5RN





KAT BI-FOLD DOOR LOW ALUMINIUM THRESHOLD


- Aluminium weathered low threshold
- Extreme weather tested
- Available for Open-In and Open-Out doors
- Optional clip-in internal/external ramps also allow use with tiled or wooden floors.
- Fully Document M compliant for wheelchair access.



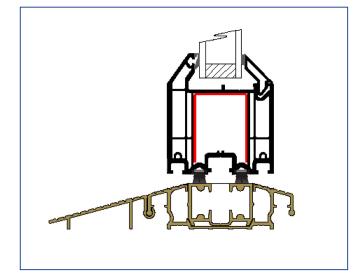







For further assistance, call 01702 613733