

#### **ALUMINIUM DOOR THRESHOLDS - VARIOUS**

#### Inside:

- Ali Door Thresholds Summary
- AM3EX Door Threshold Cill Inward Opening Doors
- AM3EX Door Threshold Sub Cill Inward Opening Doors
- AM5EX Door Threshold Cill Outward Opening Doors
- AM5EX Door Treshold Sub Cill Outward Opening Doors


For further assistance, call 01702 613733

www.climatec-windows.co.uk


11-14 Fletchers Square, Temple Farm Industrial Estate, Southend-on-Sea, Essex SS2 5RN




# ALUMINIUM DOOR THRESHOLD SYSTEMS

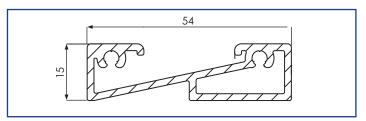


Rehau 15mm Low Threshold Single Doors Only White Gasket Only

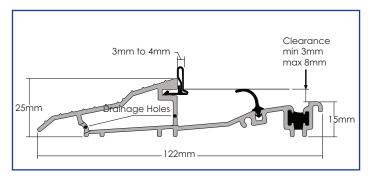


Stormguard AM3EX Threshold Cill - Open In Black Gasket Only

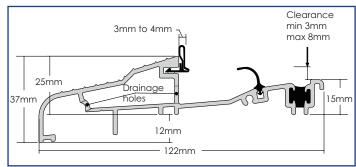

Stormguard AM3EX Threshold Sub Cill - Open In Black Gasket Only

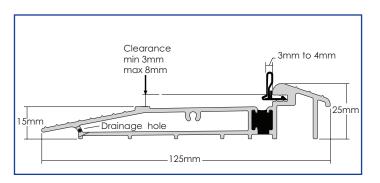

**Stormguard AM5EX Threshold Cill - Open Out Black Gasket Only** 

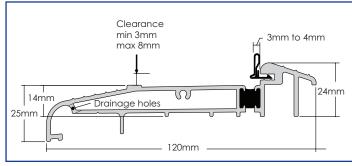


**Stormguard AM5EX Threshold Sub Cill - Open Out Black Gasket Only** 


#### For further assistance, call 01702 613733




# AM3EX DOOR THRESHOLD CILL - INWARD OPENING DOOR


- Suitable for inward opening doors.
- Fully tested resin thermal break.
- Mobility easy access.
- Designed for door set manufacturers, can be installed as the fourth side of a door frame or retro fitted.
- Thermally broken to meet thermal bridging and insulation requirements, can be used with many different frame and door materials eg. wood, PVCu, fibreglass, aluminium, steel and carbon fibre.





- Non-slip surfaces ensure a safe grip in wet conditions.
- \* Available in Matt Aluminium or Matt Gold Effect Aluminium.
- Sizes 1m, 2m and 3m
- Available with black gasket only



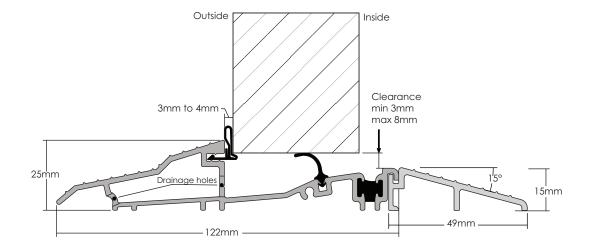



### For further assistance, call 01702 613733



# AM3EX DOOR THRESHOLD SUB CILL - INWARD OPENING DOOR

- Suitable for inward opening doors.
- Mobility easy access.
- Can meet Part 'M' requirements when the overall threshold design is specified correctly.
- With optional clip in transition ramp for wood or tile floors.
- Fully tested resin thermal break.
- Available in Matt Aluminium or Matt Gold Effect Aluminium.
- Sizes 1m, 2m and 3m.
- Compatible with 150mm, 180mm and 225mm cills only - Not compatible with 95mm cill.
- Available with black gasket only



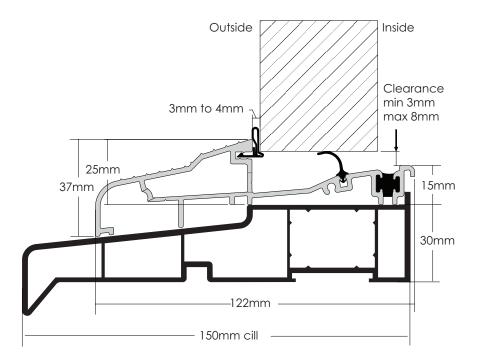

#### For further assistance, call 01702 613733


www.climatec-windows.co.uk

11-14 Fletchers Square, Temple Farm Industrial Estate, Southend-on-Sea, Essex SS2 5RN




# AM5EX DOOR THRESHOLD CILL - OUTWARD OPENING DOOR

- Suitable for outward opening doors.
- Fully tested resin thermal break.
- Mobility easy access.
- Designed for door set manufacturers, can be installed as the fourth side of a door frame or retro fitted.
- Thermally broken to meet thermal bridging and insulation requirements, can be used with many different frame and door materials eg. wood, PVCu, fibreglass, aluminium, steel and carbon fibre.



- Designed to fit directly onto level thresholds.
- Ideal for use with carpeted floors. Optional clip-in internal transition ramps also allow use with tiled or wooden floors.
- Non-slip surfaces ensure a safe grip in wet conditions.
- ❖ Available in Matt Aluminium or Matt Gold Effect Aluminium.
- Sizes 1m, 2m and 3m.
- Available with black gasket only.

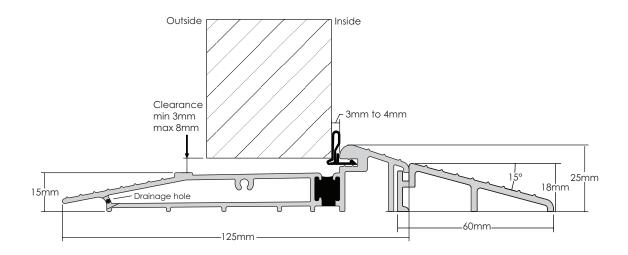



### For further assistance, call 01702 613733



# AM5EX DOOR THRESHOLD SUB CILL - OUTWARD OPENING DOOR

- Suitable for outward opening doors.
- Mobility easy access.
- Can meet Part 'M' requirements when the overall threshold design is specified correctly.
- With optional clip in transition ramp for wood or tile floors.
- Fully tested resin thermal break.
- Available in Matt Aluminium or Matt Gold Effect Aluminium.
- Sizes 1m, 2m and 3m.
- Compatible with 150mm, 180mm and 225mm cills only - Not compatible with 95mm cill.
- Available with black gasket only.

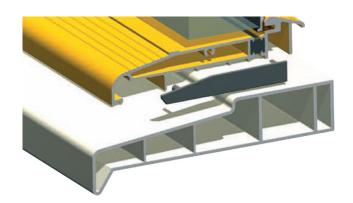

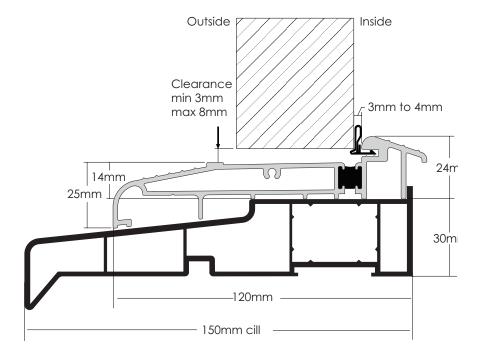

### For further assistance, call 01702 613733

www.climatec-windows.co.uk