



## CASEMENT WINDOW LOCKS - VARIOUS

### Inside:

- Yale Shootbolt Locking System
- Maco Mk1 Shootbolt & Espagnolette Locks
- Maco Mk2 Shootbolt Espagnolette Lock for Deceuninck Flush
- Kenrick Shootbolt for R9


**For further assistance, call 01702 613733**

**[www.climatec-windows.co.uk](http://www.climatec-windows.co.uk)**

11-14 Fletchers Square, Temple Farm Industrial Estate, Southend-on-Sea, Essex SS2 5RN

## YALE SHOOTBOLT LOCKING SYSTEM

- Combination of anti separation 'mushroom' cams and chamfered security shootbolts
- Robust zinc alloy strikers
- Covering Sash sizes from 326mm to 1520mm
- Manufactured to highest specifications
- 10 year mechanical guarantee

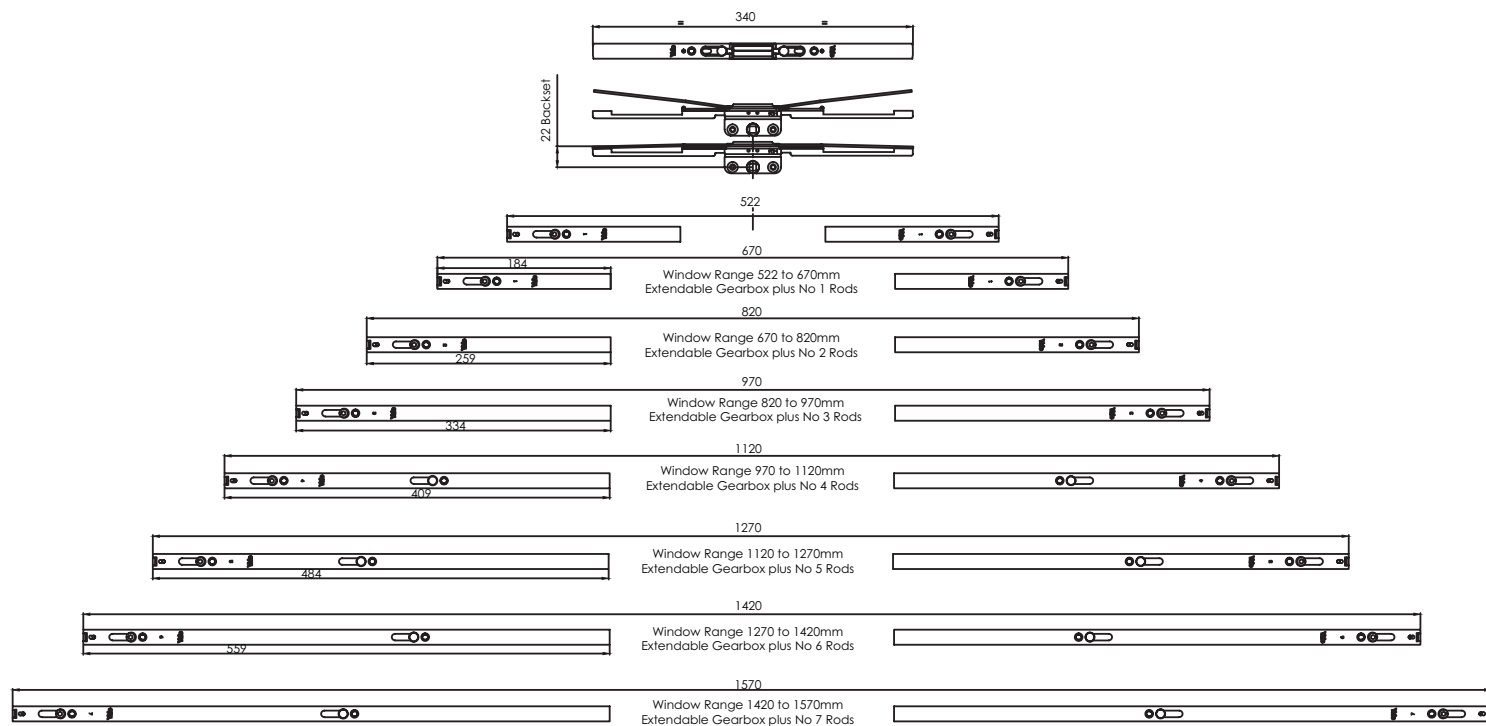

**For further assistance, call 01702 613733**

**[www.climatec-windows.co.uk](http://www.climatec-windows.co.uk)**

11-14 Fletchers Square, Temple Farm Industrial Estate, Southend-on-Sea, Essex SS2 5RN

## MACO MK1 SHOOTBOLT & ESPAGNOLETTE LOCKS

- High quality materials
- Certified to Secured By Design accreditation
- Up to 4 adjustable mushroom locking points
- Adjustable throw steel shootbolts
- Metal striker plates
- Interlocking corner striker plates
- Tested up to 7.6kn (BS7950 requires only 3Kn)
- 40,000 life cycle operations
- 500 hours salt spray resistance
- Profile specific striker plates for greater strength and security

### ESPAGNOLETTE LOCK



#### SIZE FACE PLATE LENGTH

320-400mm	131.8mm
400-800mm	356mm
800-1100mm	492mm
1100-1400mm	642mm

#### ESPAGNOLETTE SIZES


100mm  
400mm  
600mm  
800mm  
1000mm  
1200mm

### SHOOTBOLT LOCK



The bolt throw is adjusted by moving the mushroom bolt before cropping to size

Locate the extension into the corner of the sash and crop to size

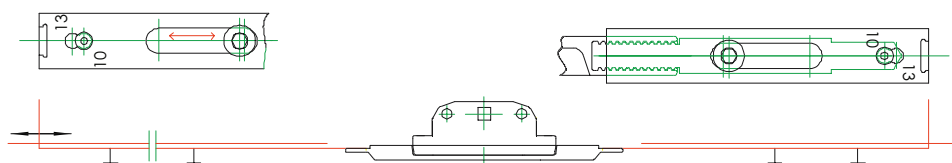

**For further assistance, call 01702 613733**

**[www.climatec-windows.co.uk](http://www.climatec-windows.co.uk)**



11-14 Fletchers Square, Temple Farm Industrial Estate, Southend-on-Sea, Essex SS2 5RN

## MACO MACH II SHOOTBOLT ESPAGNOLETTE - FOR DECEUNINCK FLUSH

- Central mushroom cams tested to 8,7Kn, almost three times more than the requirements of BS7950:1997
- MACH II meets all the requirements of BS7950:1997
- Improved screw positions so that they pick up the reinforcing
- Small routing detail maintains strength in the profile.
- Two central bi-directional mushroom cams
- 19 mm cam travel ensures maximum engagement into the striker plate.
- Adjustable shootbolt throw 10-13 mm
- Interlocking shootbolt and mushroom strikes
- Sintered steel spindle follower and drive wheels ensure strength and durability.
- Secure steel cover plate
- Locking night vent position

FLUSH SASH

BY DECEUNINCK

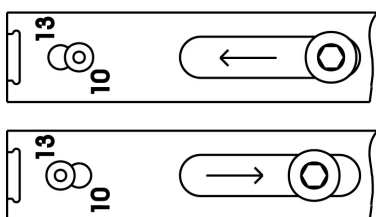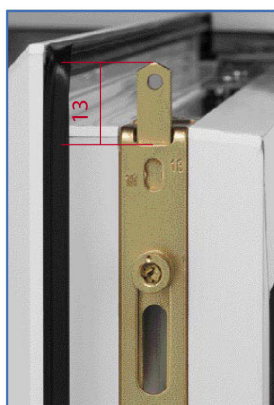

To adjust the shootbolt throw 10 to 13 mm, move the mushroom cam so that the plastic pin locates into the desired position. This should be done before either cropping the extension to size, or locating the extension into the rapid-fix drive gear.



**For further assistance, call 01702 613733**

**[www.climatec-windows.co.uk](http://www.climatec-windows.co.uk)**

11-14 Fletchers Square, Temple Farm Industrial Estate, Southend-on-Sea, Essex SS2 5RN

## KENRICK EXCALIBUR SHOOTBOLT - FOR R9



- Patented high security claw locking
- Steel shoot bolts
- Secure by Design product
- Robust unhanded die-cast gearbox
- Profile related keeps with night vent facility
- 25mm Backset
- Bi-directional die cast claws
- Tested to 100,000 cycles
- 10 year mechanical guarantee
- Minimum of 240 hours salt spray testing exceeding BSEN 1670:2007
- Locking night vent position



**For further assistance, call 01702 613733**

**[www.climatec-windows.co.uk](http://www.climatec-windows.co.uk)**

11-14 Fletchers Square, Temple Farm Industrial Estate, Southend-on-Sea, Essex SS2 5RN