

CASEMENT WINDOW LOCKS - VARIOUS

Inside:

- Yale Shootbolt Locking System
- Maco Mk1 Shootbolt & Espagnolette Locks
- Maco Mk2 Shootbolt Espagnolette Lock for Deceuninck Flush
- Kenrick Shootbolt for R9
- Folding Opener Plus

For further assistance, call 01702 613733

www.climatec-windows.co.uk

11-14 Fletchers Square, Temple Farm Industrial Estate, Southend-on-Sea, Essex SS2 5RN




YALE SHOOTBOLT LOCKING SYSTEM

- Combination of anti separation 'mushroom' cams and chamfered security shootbolts
- Robust zinc alloy strikers
- Covering Sash sizes from 326mm to 1520mm
- Manufactured to highest specifications
- 10 year mechanical guarantee





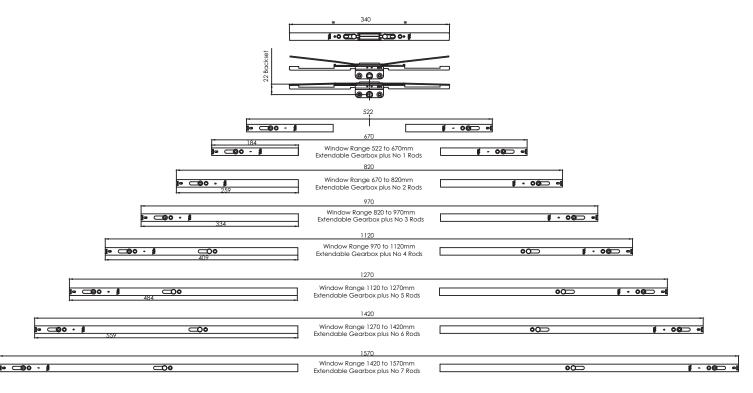

For further assistance, call 01702 613733


www.climatec-windows.co.uk




MACO MK1 SHOOTBOLT & ESPAGNOLETTE LOCKS

- High quality materials
- Certified to Secured By Design accreditation
- Up to 4 adjustable mushroom locking points
- Adjustable throw steel shootbolts
- Metal striker plates
- Interlocking corner striker plates
- Tested up to 7.6kn (BS7950 requires only 3Kn)
- 40,000 life cycle operations
- 500 hours salt spray resistance
- Profile specific striker plates for greater strength and security

SIZE	FACE PLATE LENGTH	ESPAGNOLETTE SIZES
320-400mm	131.8mm	100mm
400-800mm	356mm	400mm
800-1100mm	492mm	600mm
000-1100111111	43211111	800mm
1100-1400mm	642mm	1000mm
		1200mm

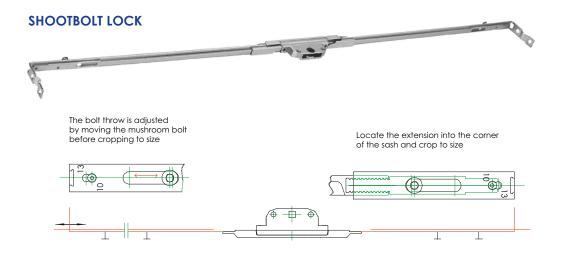

ESPAGNOLETTE LOCK

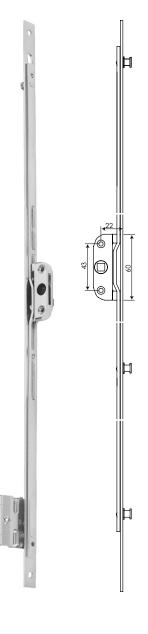


For further assistance, call 01702 613733



MACO MACH II SHOOTBOLT ESPAGNOLETTE - FOR DECEUNINCK FLUSH

- Central mushroom cams tested to 8,7Kn, almost three times more than the requirements of BS7950:1997
- MACH II meets all the requirements of BS7950:1997
- Improved screw positions so that they pick up the reinforcing
- Small routing detail maintains strength in the profile.
- Two central bi-directional mushroom cams
- 19 mm cam travel ensures maximum engagement into the striker plate.
- Adjustable shootbolt throw 10-13 mm
- Interlocking shootbolt and mushroom strikes
- Sintered steel spindle follower and drive wheels ensure strength and durability.
- Secure steel cover plate
- Locking night vent position









To adjust the shootbolt throw 10 to 13 mm, move the mushroom cam so that the plastic pin locates into the desired position. This should be done before either cropping the extension to size, or locating the extension into the rapid-fix drive gear.





For further assistance, call 01702 613733

www.climatec-windows.co.uk



KENRICK EXCALIBUR SHOOTBOLT - FOR R9

- Patented high security claw locking
- Steel shoot bolts
- Secure by Design product
- Robust unhanded die-cast gearbox
- Profile related keeps with night vent facility
- 25mm Backset
- Bi-directional die cast claws
- Tested to 100,000 cycles
- 10 year mechanical guarantee
- Minimum of 240 hours salt spray testing exceeding BSEN 1670:2007
- Locking night vent position







For further assistance, call 01702 613733

www.climatec-windows.co.uk




FOLDING OPENER PLUS

Designed and styled for today's contemporary market, the 'Fo Plus' folding opener range offers a new tandem bar shape and is available in Transom (110 Type) and Sill (112 Type) level options.

- Gives secure locking and controlled ventilation in one simple operation.
- Ideal for use in schools, hospitals, offices, hotels, residential homes and sheltered housing.
- Concealed bracket fixing and pins.
- ❖ Anodised or paint finish options. Available in 5 RAL colours.













For further assistance, call 01702 613733