



SMOKE WINDOWS / AOVs (AUTOMATIC OPENING VENTS) - CHAIN ACTUATORS

Inside:

- Chain Actuator - SECO Ni 24 40 - Stroke 600, 900mm
- Chain Actuator - Twin SECO Ni - Stroke 600, 900mm

For further assistance, call 01702 613733



www.climatec-windows.co.uk

11-14 Fletchers Square, Temple Farm Industrial Estate, Southend-on-Sea, Essex SS2 5RN

CHAIN ACTUATOR SECO NI 24 40

Certified and compliant chain actuator designed to provide precise and reliable operation for smoke and environmental ventilation applications.

- Tested with REHAU Total70C profile system (105.5mm Sash 546635 72mm Outer Frame 546185) to smoke vent standard EN12101-2-2003
- Stroke 600mm, 900mm
- Compact design with variable options for stroke length
- Quiet operation with configurable speed control
- 900mm version is not suitable for Top Hung applications

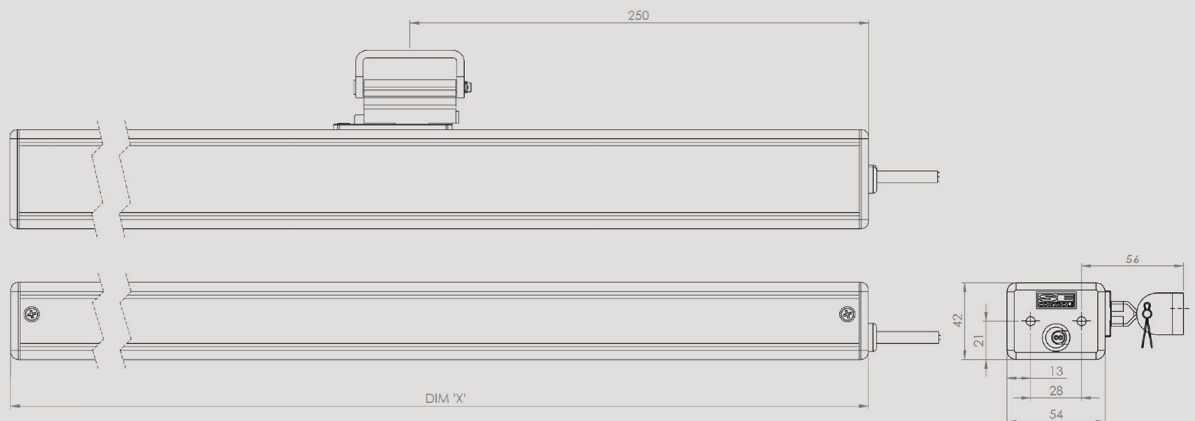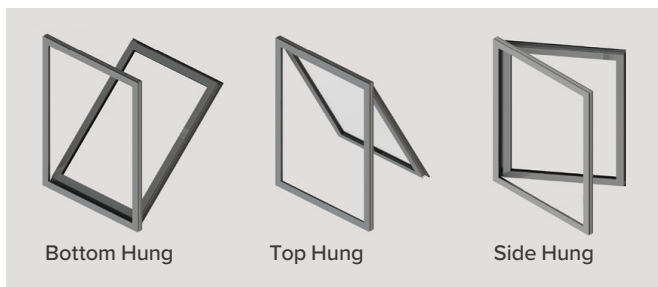

Dimensions

Dim X (mm)	Stroke (mm)
635	up to 600
785	601-900

For further assistance, call 01702 613733



www.climatec-windows.co.uk

11-14 Fletchers Square, Temple Farm Industrial Estate, Southend-on-Sea, Essex SS2 5RN

CHAIN ACTUATOR TWIN SECO NI 24 40

Certified and compliant chain actuator designed to provide precise and reliable operation for smoke and environmental ventilation applications.

- Tested with REHAU Total70C profile system (105.5mm Sash 546635 72mm Outer Frame 546185) to smoke vent standard EN12101-2-2003
- Stroke 600mm, 900mm
- Compact design with variable options for stroke length
- Quiet operation with configurable speed control
- 900mm version is not suitable for Top Hung applications

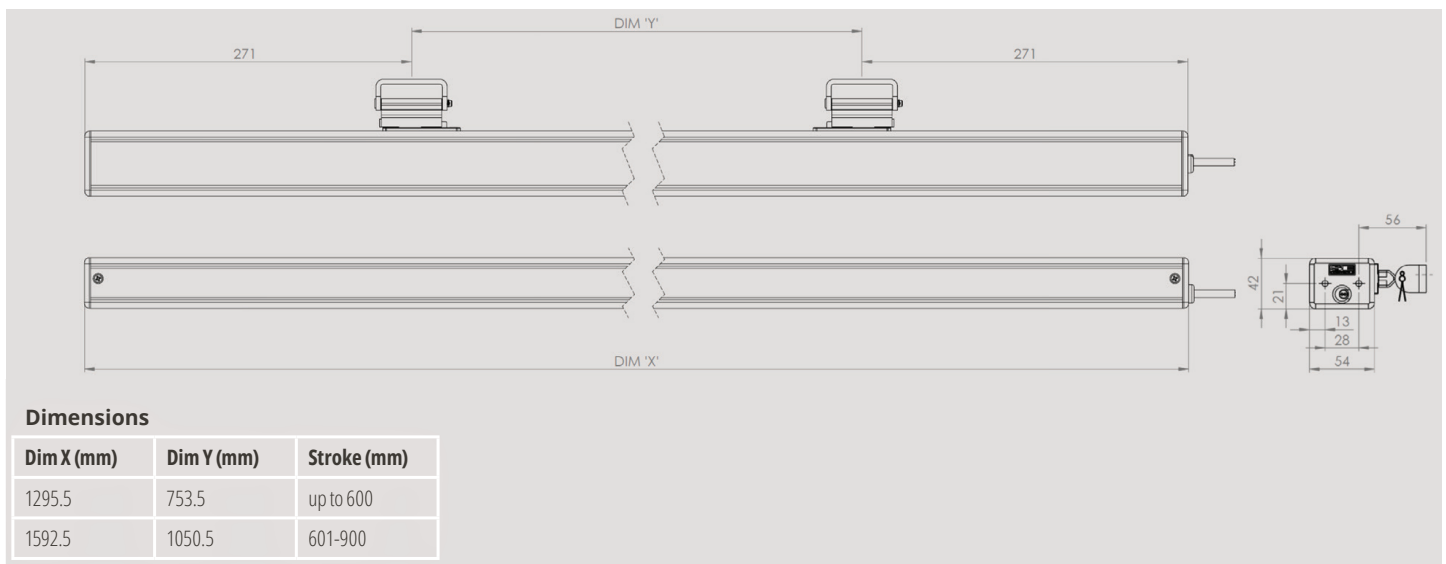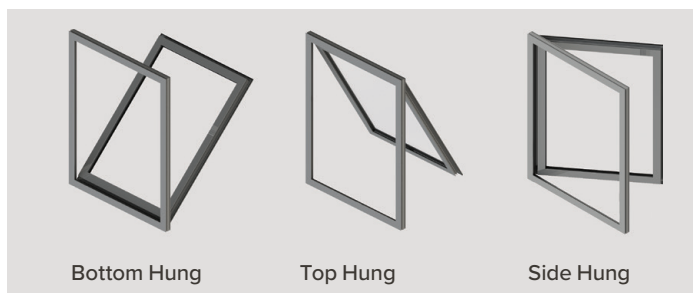

For further assistance, call 01702 613733

www.climatec-windows.co.uk

11-14 Fletchers Square, Temple Farm Industrial Estate, Southend-on-Sea, Essex SS2 5RN