

## **FRENCH DOOR LOCKS - VARIOUS**

#### Inside:

- Yale Mantis 3 Multi-point French Door Lock
- French Door Fingerbolt or Concealed Shootbolt
- Fuhr Passive French Door Lock
- Fuhr 2 Hooks French Door Lock
- Fuhr 2 Cams French Door Lock

## For further assistance, call 01702 613733





## YALE MANTIS 3 MULTI-POINT FRENCH DOOR LOCK

- High security french door system
- 25mm deep throw anti lift security hooks
- 22mm security compression bolts
- Key operated centre deadbolt
- Top and bottom shootbolts
- 35mm backset
- Sprung centre cases
- Industry standard PZ92mm centre case
- Stainless steel 16mm face plates
- British built







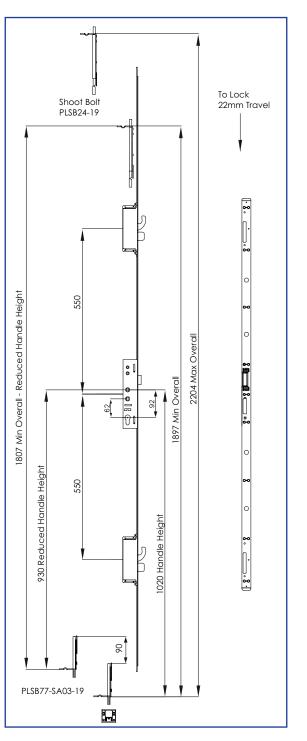

### For further assistance, call 01702 613733

www.climatec-windows.co.uk

11-14 Fletchers Square, Temple Farm Industrial Estate, Southend-on-Sea, Essex SS2 5RN



### FRENCH DOOR FINGERBOLT OR CONCEALED SHOOTBOLT


#### **FINGER BOLTS**

- 16mm wide silver finish designed to fit in the eurogroove
- Shoot bolt throw 20mm

#### SECOND SASH BOLT

- Top and bottom shoot bolt throw 18mm
- Top and bottom shoot bolt sealing pressure adjustable via profile related plates
- Profile related plates

To suit door rebate height 1600mm - 2200mm

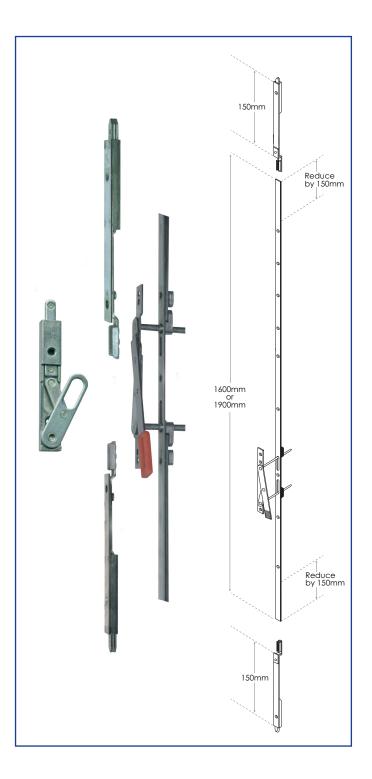


### For further assistance, call 01702 613733



### FUHR PASSIVE FRENCH DOOR LOCK

- Three piece lever operated key locking door bolt set
- 16mm wide steel flat faceplate
- Silver bichromate finish
- Enclosed zinc plated lockcase to suit lever and profile cylinder
- Top and bottom shootbolts designed to fit into slave door eurogroove prior to attaching false mullion
- Top and bottom shoot bolt throw 19mm
- Top and bottom shoot bolt sealing pressure adjustable via profile related plates
- Profile related plates

To suit door rebate height 1660mm - 2120mm

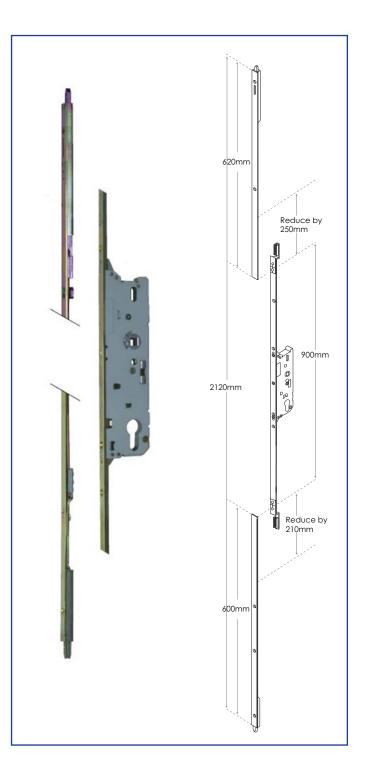


### For further assistance, call 01702 613733

### HARDWARE SPECIFICATION SHEET HARDWARE SPECIFICATION SHEET



## FUHR 2 HOOKS FRENCH DOOR LOCK

- Reversible latch
- Latch sealing pressure adjustable via profile related plates
- Adjustable roller cams +/- 1mm provide consistently smooth and reliable engagement into plates
- Roller cam travel 19mm
- Top and bottom shoot bolt throw 19mm
- Top and bottom shoot bolts each prepared to receive single hook
- Steel hook bolt throw 20mm with lockout for strength and security
- Top and bottom shoot bolt sealing pressure adjustable via profile related plates
- Deadbolt throw 20mm (Backset 35mm, 40mm)
- Multipoint function provides enhanced noise reduction and heat insulation
- Split spindle
- Profile related plates

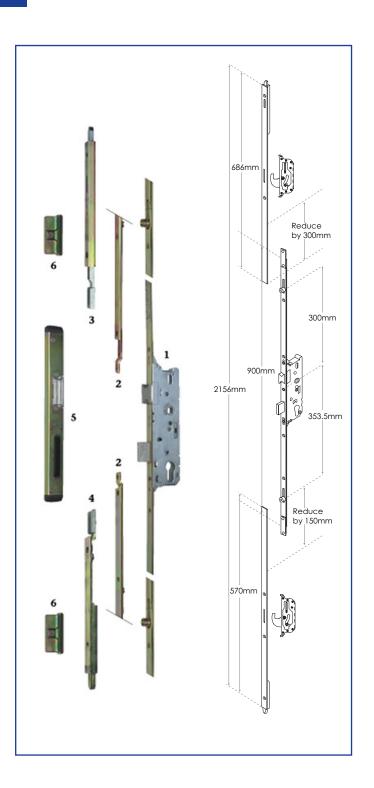


### For further assistance, call 01702 613733



### FUHR 2 CAMS FRENCH DOOR LOCK

- Reversible latch
- Latch sealing pressure adjustable via profile related plates
- Adjustable roller cams +/- 1mm provide consistently smooth and reliable engagement into plates
- Roller cam travel 19mm
- Top and bottom shoot bolt throw 19mm
- Top and bottom shoot bolt sealing pressure adjustable via profile related plates
- Deadbolt throw 20mm (Backset 35mm, 40mm)
- Multipoint function provides enhanced noise reduction and heat insulation
- Split spindle
- Profile related plates

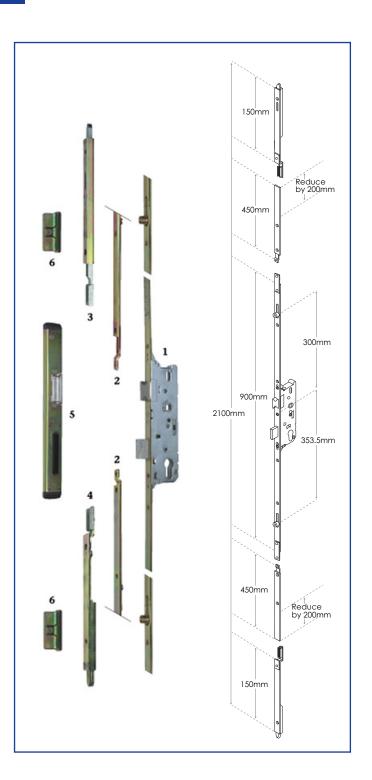

### For further assistance, call 01702 613733